


Extended Digital I/O for MODCELL™ Multiloop Processors and MOD 30ML Multiloop Controllers

- Low Cost Digital I/O Modules of 8 or 16 I/O Points
- One Interface Module on MODCELL or MOD 30ML
- Expand Digital I/O to 100 Points
- Useful for Interlocking, Sequencing or Discrete Control
- Configured using Visual Application Designer Software for MOD 30ML and MODCELL.

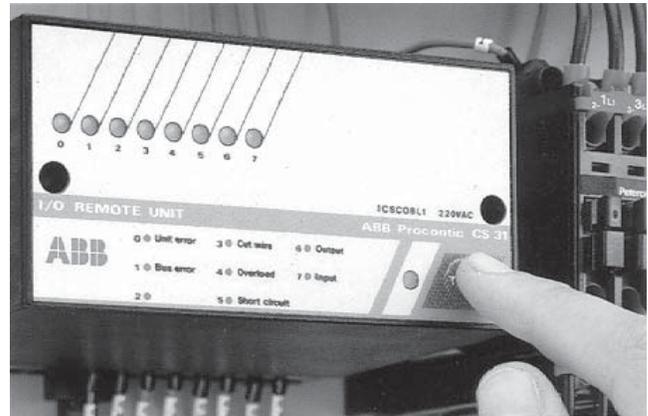

Extended Digital I/O for MODCELL™ Multiloop Processors & MOD 30ML Multiloop Controller

FUNCTIONALITY

Extended digital I/O modules expand the digital I/O capability of MODCELL Multiloop Processors and MOD 30ML Multiloop Controllers to a total of 100 discrete points. The modules communicate to the base unit over the Extended Digital I/O Network, an RS485 communication bus which connects to the base unit via a plug-in module. This module is not required to reside in a communications slot, leaving the communications channels on the unit open for host or peer-to-peer communications.

Extended digital I/O modules may be combined with the local I/O modules to provide the optimum configuration for a given application. Process measurements requiring a higher degree of resolution, or critical control loops, can be implemented using the single-point isolated local I/O modules.

EXTENDED DIGITAL I/O MODULES

Each module is mounted on a Module Carrier, a plug-in base which contains signal terminations, address switch and mounting plate. The module carrier can be DIN or surface mounted. Extended digital I/O modules provide status and error LEDs and diagnostic test button, and are available for 24VDC, 120VAC or 220VAC power supply.

Discrete input modules are available in isolated and non-isolated versions, for 24VDC, 230VAC and 120VAC inputs. Isolated versions provide optoisolation to 1500VAC. Discrete output modules provide eight relay or transistor outputs.

Combination discrete input/output modules have twelve 24V DC inputs and eight 2A relay outputs, while a configurable version of the combination module allows a total of eight points to be individually selected as 24VDC inputs or 24VDC (.5A) transistor outputs.

EXTENDED DIGITAL I/O NETWORK

The Extended Digital I/O Network is an RS-485 bus up to 500 meters (1600 feet) in length. It connects to the terminations on the base unit and is multidropped to the Extended Digital I/O modules. Two wires plus shield are used for the network (shield is required over 50m). CRC checking is provided by the network protocol.

One Extended Digital I/O Interface Module is required for each network to be connected to the base unit (maximum of two networks). It may be placed in any slot on the base unit. The Extended Digital I/O modules are scanned every 50ms.

CONFIGURATION

Extended Digital I/O modules are configured as part of the database using the Visual Application Designer (ViZapp). Wiring descriptions may be entered and printed for each input and output point.

GENERAL SPECIFICATIONS

Operating Range

AC Versions

110/120VAC: 112.8 - 127.2V 50/60Hz

220/230VAC: 195.5 - 253V 50/60Hz

DC Version

19.2 - 20VDC

Operating Temperature

0 to 55°C (32 to 131°F)

Storage Temperature

-40 to 75°C (-40 to 167°F)

Humidity - non condensing

Average £ 75% yearly

Maximum £ 95% over 30 days

Extended Digital I/O Network

Maximum Length 500 meters (1600 feet)

Baud rate 187.5K baud

Maximum addresses

32 (31 slaves + 1 Extended Digital I/O Interface module master at address 0)

Cabling (Extended Digital I/O bus)

Indoor use: Belden #9182

Indoor plenum use: Belden #89182

Underground use: Belden #9815 twisted twinax

Outdoor above ground use: NOT recommend.


Termination:

120 ohm resistor across two conductors at end of cable (2 shipped with Extended Digital I/O Interface module)

DIMENSIONS

ICS Digital Modules with Plug-in Base


Weight 24Vdc Modules with base: 0.45 kg (1 lb)
 Weight 120/230Vac Modules with base: 0.63 kg (1.39 lbs)

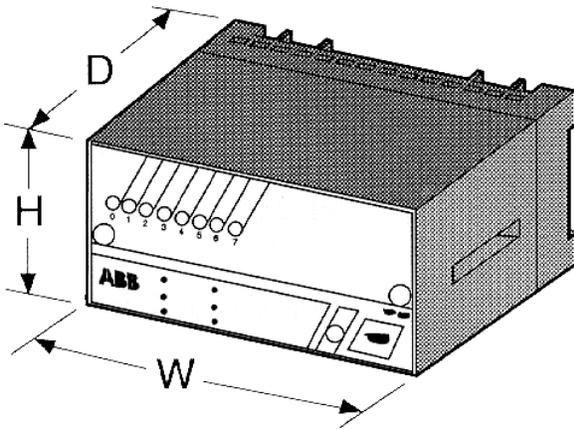

| | mm | inches |
|----------------------|-----|--------|
| W | 120 | 4.72 |
| W (with base) | 123 | 4.84 |
| H | 60 | 2.36 |
| H (with base) | 64 | 2.52 |
| D | 115 | 4.53 |

ECZ Plug-in Base

Weight: 0.20 kg (0.44 lbs)

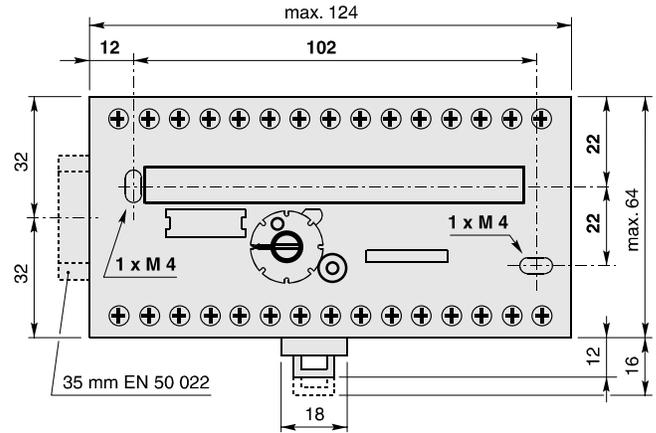

| | mm | inches |
|----------|-----|--------|
| W | 123 | 4.84 |
| H | 64 | 2.52 |
| D | 30 | 1.18 |

Mounting

DIN rail 35 mm
 Screw screws 04 mm (M4)

TECHNICAL CHARACTERISTICS - DIGITAL MODULES

| ICSI 08 D1 Digital Input Module | 120 / 230 VAC | 24 VDC |
|--------------------------------------|---------------|--------------|
| Number inputs | 8 | 8 |
| Power supply isolation | 1500 VAC | no |
| Inputs opto-isolated | no | no |
| Supply output regulated 24VDC (± 5%) | 100 mA | - |
| Signal level, nominal | 24 VDC | 24 VDC |
| Signal level: | | |
| 0 signal | -3 to +5V | -3 to +5V |
| 1 signal | +15 to +30 V | +15 to +30 V |
| Input current, 24VDC | 6 mA | 6 mA |
| Input delay | 8 ms | 8 ms |
| Max power consumption | 10 VA | 0.2 A |
| Max power dissipation | 8 W | 4.5 W |

| ICSI 16 D1 Digital Input Module | 120 / 230 VAC | 24 VDC |
|--------------------------------------|---------------|--------------|
| Number inputs | 16 | 16 |
| Power supply isolation | 1500 VAC | no |
| Inputs opto-isolated | no | no |
| Supply output regulated 24VDC (± 5%) | 100 mA | - |
| Signal level, nominal | 24 VDC | 24 VDC |
| Signal level: | | |
| 0 signal | -3 to +5V | -3 to +5V |
| 1 signal | +15 to +30 V | +15 to +30 V |
| Input current, 24VDC | 6 mA | 6 mA |
| Input delay | 8 ms | 8 ms |
| Max power consumption | 10 VA | 0.2 A |
| Max power dissipation | 8 W | 4.5 W |

| ICSI 08 E1 Digital Input Module | 120 / 230 VAC | 24 VDC |
|---------------------------------|---------------|--------------|
| Number inputs | 8 | 8 |
| Power supply isolation | 1500 VAC | no |
| Inputs opto-isolated | 1500 VAC | 1500 VAC |
| Signal level, nominal | 24 VDC | 24 VDC |
| Signal level: | | |
| 0 signal | -3 to +5V | -3 to +5V |
| 1 signal | +15 to +30 V | +15 to +30 V |
| Input current, 24VDC | 12 mA | 12 mA |
| Input delay | 8 ms | 8 ms |
| Max power consumption | 10 VA | 0.2 A |
| Max power dissipation | 8 W | 4.5 W |

| ICSI 16 E1 Digital Input Module | 120 / 230 VAC | 24 VDC |
|---------------------------------|---------------|--------------|
| Number inputs | 16 | 16 |
| Power supply isolation | 1500 VAC | no |
| Inputs opto-isolated | 1500 VAC | 1500 VAC |
| Signal level, nominal | 24 VDC | 24 VDC |
| Signal level: | | |
| 0 signal | -3 to +5V | -3 to +5V |
| 1 signal | +15 to +30 V | +15 to +30 V |
| Input current, 24VDC | 6 mA | 6 mA |
| Input delay | 8 ms | 8 ms |
| Max power consumption | 10 VA | 0.2 A |
| Max power dissipation | 8 W | 4.5 W |

| ICSI 08 E3/E4 Digital Input Module | 120 VAC | 230 VAC |
|------------------------------------|-------------|--------------|
| Number inputs | 8 | 8 |
| Power supply isolation | 1500 VAC | 1500 VAC |
| Inputs opto-isolated | 1500 VAC | 1500 VAC |
| Signal level, nominal | 120 VAC | 230 VAC |
| Signal level: | | |
| 0 signal | 0 to 20 V | 0 to 40 V |
| 1 signal | 79 to 132 V | 159 to 242 V |
| Input current, 24VDC | 3.2 mA | 6.5 mA |
| Input delay | 10 ms | 10 ms |
| Max power consumption | 5 VA | 5 VA |
| Max power dissipation | 6 W | 6 W |

| ICSO 08 R1 Digital Output Module | 120 / 230 VAC | 24 VDC |
|----------------------------------|---------------|-----------|
| Number outputs | 8 | 8 |
| Power supply isolation | 1500 VAC | no |
| Outputs isolated | 1500 VAC | 1500 VAC |
| Switching capacity | | |
| 120/230 AC | 2:00 AM | 2:00 AM |
| DC | 60 W (2A) | 60 W (2A) |
| Load current, nominal | 2 A AC1 | 2 A AC1 |
| Minimum values | 10 mVDC | 10 mVDC |
| | 10 mA | 10 mA |
| Total current for 8 outputs | 16 A | 16 A |
| Short circuit shutdown | no | no |
| Shutdown voltage limiter | Varistor | Varistor |
| Max power consumption | 6 VA | 0.2 A |
| Max power dissipation | 5 W | 5 W |

TECHNICAL CHARACTERISTICS - DIGITAL MODULES (continued)

| ICSO 08 Y1 Digital Output Module | 120 / 230 VAC | 24 VDC |
|----------------------------------|---------------|----------|
| Number outputs | 8 | 8 |
| Power supply isolation | 1500 VAC | no |
| Outputs opto-isolated | 1500 VAC | 1500 VAC |
| Maximum current | 2 A AC1 | 2 A AC1 |
| Total current for 8 outputs | 8:00 AM | 8:00 AM |
| Short circuit protection | yes | yes |
| Overload thermal protection | yes | yes |
| Max power consumption | 6 VA | 0.2 A |
| Max power dissipation | 8 W | 6 W |

| ICSK 20 F1 Digital Input/Output Module | 120 / 230 VAC | 24 VDC |
|--|---------------|--------------|
| Number inputs | 12 | 12 |
| Number outputs | 8 | 8 |
| Power supply isolation | 1500 VAC | no |
| Max power consumption | 0.3 A | 10 VA |
| Opto isolated inputs | no | no |
| Input signal level, nominal | 24 VDC | 24 VDC |
| Input signal level | | |
| 0 signal | -3 to +5V | -3 to +5V |
| 1 signal | +15 to +30 V | +15 to +30 V |
| Input current, 24 VDC | 5 mA | 5 mA |
| Input delay | 8 ms | 8 ms |
| Opto-isolated outputs | yes | yes |
| Switching capacity | | |
| 120/230 VAC 50/60 Hz | 2:00 AM | 2:00 AM |
| DC | 60 W (2A) | 60 W (2A) |
| Nominal output current | 2 A AC1 | 2 A AC1 |
| Minimum contact power | 12 VDC | 12 VDC |
| | 10 mA | 10 mA |
| Supply output regulated 24VDC (± 5%) | 100 mA | - |
| Total output current | | |
| Common M-Q | | |
| 120/230VAC 50/60 Hz | 6:00 AM | 6:00 AM |
| 24 VDC | 6:00 AM | 6:00 AM |
| Common R-T | | |
| 120/230VAC 50/60 Hz | 4:00 AM | 4:00 AM |
| 24 VDC | 4:00 AM | 4:00 AM |
| Short circuit protection | no | no |
| Over voltage protection | Varistor | Varistor |

| ICSC 08 L1 Digital Input/Output Module | 120 / 230 VAC | 24 VDC |
|--|-------------------------|-------------------------|
| Number inputs | 8 maximum | 8 maximum |
| Number outputs | 8 maximum | 8 maximum |
| Power supply isolation | 1500 VAC | no |
| Max power consumption (with load on outputs) | 0.2 A | 0.2 A |
| Max power dissipation | 6 W | 6 W |
| Opto isolated inputs | no | no |
| Input signal level, nominal | 24 VDC | 24 VDC |
| Input signal level | | |
| 0 signal | -3 to +5V | -3 to +5V |
| 1 signal | +15 to +30 V | +15 to +30 V |
| Input current (<24 VDC) | 6 mA | 6 mA |
| Input delay | 8 ms | 8 ms |
| Opto-isolated outputs | no | no |
| Output process supply | 24 VDC | 24 VDC |
| Max voltage drop (under nominal load) | 3 V | 3 V |
| Residual current, 0 signal | < 1 mA | < 1 mA |
| Switching frequency (inductive loads) | max 0.1 Hz | max 0.1 Hz |
| Maximum current | 0.5 A | 0.5 A |
| Lamp loads | 5 W | 5 W |
| Total current, 8 outputs | max 2 A | max 2 A |
| Short circuit protection | I > 2 A | I > 2 A |
| Overload protection | I > 0.6A, t > 250 ms | I > 0.6A, t > 250 ms |

Ordering Information

1. Select Extended Digital I/O modules for appropriate power supply.
2. Select equal number of Extended Digital I/O Module Carrier units (one per Extended Digital I/O Module unless otherwise indicated).
3. Select one Extended Digital I/O Interface Module for each Extended Digital I/O Network to be connected to the base unit.

Extended Digital I/O Modules - for 110/120VAC External Power

Digital Input Modules

| | |
|--|----------------|
| 8 non-isolated 24VDC input channels | ICSI 08 D1-120 |
| 8 isolated 24VDC input channels | ICSI 08 E1-120 |
| 8 isolated 120VAC input channels | ICSI 08 E3-120 |
| 16 non-isolated 24VDC input channels | ICSI 16 D1-120 |
| 16 isolated 24VDC input channels | ICSI 16 E1-120 |

Digital Output Modules

| | |
|---|----------------|
| 8 relay output channels 2A | ICSO 08 R1-120 |
| 8 transistor output channels 24VDC 2A | ICSO 08 Y1-120 |

Digital Input/Output Modules

| | |
|---|----------------|
| 12 non-isolated 24VDC input channels and 8 isolated relay output channels | ICSK 20 F1-120 |
| 8 user-configurable channels for 24VDC input or 24VDC 500mA transistor output | ICSI 08 L1-120 |

Extended Digital I/O Modules - for 220/230VAC External Power

Digital Input Modules

| | |
|--|----------------|
| 8 non-isolated 24VDC input channels | ICSI 08 D1-230 |
| 8 isolated 24VDC input channels | ICSI 08 31-230 |
| 8 isolated 230VAC input channels | ICSI 08 E4-230 |
| 16 non-isolated 24VDC input channels | ICSI 16 D1-230 |
| 16 isolated 24VDC input channels | ICSI 16 E1-230 |

Digital Output Modules

| | |
|---|----------------|
| 8 relay output channels 2A | ICSO 08 R1-230 |
| 8 transistor output channels 24VDC 2A | ICSO 08 Y1-230 |

Digital Input/Output Modules

| | |
|---|----------------|
| 12 non-isolated 24VDC input channels and 8 isolated relay output channels | ICSK 20 F1-230 |
| 8 user-configurable channels for 24VDC input or 24VDC 500mA transistor output | ICSC 08 L1-230 |

Extended Digital I/O Modules - for 24VDC External Power

Digital Input Modules

| | |
|--|---------------|
| 8 non-isolated 24VDC input channels | ICSI 08 D1-24 |
| 8 isolated 24VDC input channels | ICSI 08 E1-24 |
| 16 non-isolated 24VDC input channels | ICSI 16 D1-24 |
| 16 isolated 24VDC input channels | ICSI 16 E1-24 |

Digital Output Modules

| | |
|---|---------------|
| 8 relay output channels 2A | ICSO 08 R1-24 |
| 8 transistor output channels 24VDC 2A | ICSO 08 Y1-24 |

Digital Input/Output Modules

| | |
|---|---------------|
| 12 non-isolated 24VDC input channels and 8 isolated relay output channels | ICSK 20 F1-24 |
| 8 user-configurable channels for 24VDC input or 24VDC 500mA transistor output | ICSC 08 L1-24 |

Extended Digital I/O Accessories

| | |
|---|--------------|
| Extended Digital I/O Module Carrier | ECZ |
| Extended Digital I/O Interface Module (one per network) Occupies 2 slots on MODCELL Multiloop Processor or MOD 30ML Multiloop Controller | 2020NZ10000B |

NOTES

NOTES

www.micromodautomation.com

The Company's policy is one of continuous product improvement and the right is reserved to modify the information contained herein without notice.

Printed in USA (05.5.04)

© MicroMod Automation, Inc. 2004



Application-smart control solutions

MicroMod Automation, Inc.
75 Town Centre Dr.
Rochester, NY 14623 USA
Tel: (585) 321-9200
Fax: (585) 321-9291
Email: sales@micromod.com

S-MOD-EXT IO_1